



HÖCKER F-SERIES Structures

A-Frame Design

F20-266-202

SPECIFICATIONS

Span width:

20.00m

Eave Height:

2.66m

Ridge height:

6.00m

Peak height:

N/A

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

3 Gable upright (per end)

Longest component (m):

10.70m

Minimum length:

20.00m

Maximum length:

Unlimited in 5.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to Norm DIN EN 13782:

102 km/h (0.50kN/m²)

Main profile size:

202/122/4mm(4-channel)

Eave connection type:

Sliding connection

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

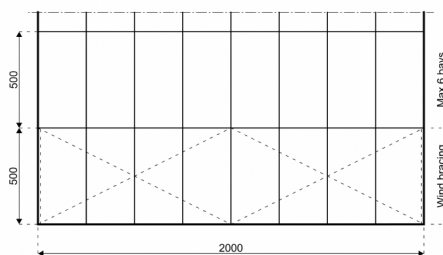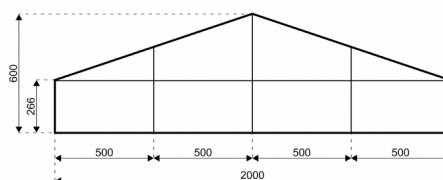

ACCESSORIES AVAILABLE

- ▶ External / Internal Entrance Ramp
- ▶ Overhead Door Canopy

- ▶ ABS Transportation Storage Rack
- ▶ Double Entrance/Exit Door

- ▶ Internal Decorative Linings
- ▶ Door Transportation Storage Rack

- ▶ Frame Transportation Storage Rack
- ▶ Bar Tensioned Roof

- ▶ Single Entrance/Exit Door
- ▶ Glass / ISO Walling Transportation Storage Rack
- ▶ Cover Transportation Storage Rack
- ▶ More accessories are available...



HEAD OFFICE AND PRODUCTION

Röder HTS Höcker GmbH
Hinter der Schlagmühle 1
Kefenrod, D-63699
Germany

Telephone: +49 (0) 60 49 95 100

Fax: +49 (0) 60 49 95 1020

Email: sales@roderhts.com

Web: www.roderhts.com

REPRESENTED WORLDWIDE IN:

Australia
Austria
Bosnia
Bulgaria

Central America
Croatia
France
Ireland
Germany

Great Britain
Greece
Romania
India
Ireland
Italy

Middle Asia
Middle East
Netherlands
North America
Poland
Russia

Scandinavia
Singapore
Slovenia
South Africa
South America
Spain
Switzerland