



HÖCKER F-SERIES Structures

A-Frame Design

SPECIFICATIONS

F25-266-202

Span width:

25.00m

Eave Height:

2.66m

Ridge height:

6.80m

Peak height:

N/A

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

4 Gable upright (per end)

Longest component (m):

13.25m

Minimum length:

20.00m

Maximum length:

Unlimited in 5.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to Norm DIN EN 13782:

102 km/h (0.50kN/m²)

Main profile size:

202/122/4mm(4-channel)

Eave connection type:

Sliding connection

Aluminium type:

European - Hard Pressed Extruded Structural



Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

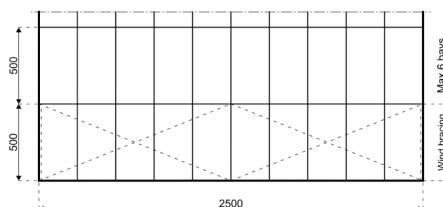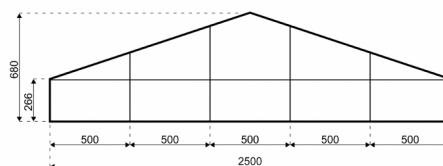

ACCESSORIES AVAILABLE

- ▶ External / Internal Entrance Ramp
- ▶ Overhead Door Canopy

- ▶ Internal Decorative Linings
- ▶ Door Transportation Storage Rack

- ▶ Single Entrance/Exit Door
- ▶ Glass / ISO Walling Transportation Storage Rack
- ▶ Cover Transportation Storage Rack
- ▶ More accessories are available...

- ▶ ABS Transportation Storage Rack
- ▶ Double Entrance/Exit Door

- ▶ Frame Transportation Storage Rack
- ▶ Bar Tensioned Roof



HEAD OFFICE AND PRODUCTION

Röder HTS Höcker GmbH
Hinter der Schlagmühle 1
Kefenrod, D-63699
Germany

Telephone: +49 (0) 60 49 95 100

Fax: +49 (0) 60 49 95 1020

Email: sales@roderhts.com

Web: www.roderhts.com

REPRESENTED WORLDWIDE IN:

Australia
Austria
Bosnia
Bulgaria

Central America
Croatia
France
Germany

Great Britain
Greece
Romania
India
Ireland
Italy

Middle Asia
Middle East
Netherlands
North America
Poland
Russia

Scandinavia
Singapore
Slovenia
South Africa
South America
Spain
Switzerland